

BPT SERIES

Transient Voltage Surge Suppression for ... Main, Branch and Local Panels

The **BPT Series** is a Transient Protection System that provides heavy-duty surge protection and filtering for industrial and commercial sites against the harmful affects of transient energies induced on AC power lines.

The BPT's unique construction allows it to deliver low clamping voltages while safely handling large surge currents. Configured for parallel installation, units install quickly and easily and require very little maintenance while in service. All models have a 100kA rms symmetrical fault current rating and are suitable for Type 1 or Type 2 service panel applications.


On-board diagnostics include a front panel display equipped with LED indicators that continuously monitor the operational status of the entire unit. An audio alarm is standard with switch positions for test, able and enable. A set of NO/NC dry contacts, as an interface for remote monitoring, is also standard. A Surge Counter and a Remote Monitor are available options.

PRODUCT FEATURES


- ◆ ETL Listed to UL 1449, 3rd Edition
- ◆ Solid State MOV Components
- ◆ Patented Integrated Thermal Overload Protection
- ◆ Low Impedance Construction Provides Low Clamping
- ◆ Fault Current Rating: 100kA rms symmetrical
- ◆ Optional Filtering Listed to UL 1283, 3rd Edition
- ◆ Comprehensive Front Panel Diagnostics with LED Indicators and Audio Alarm
- ◆ Form C (NO/NC) Dry Contacts Standard
- ◆ Surge Counter Standard
- ◆ Available Remote Monitor Option
- ◆ Rugged NEMA 12 Enclosure
- ◆ Fast Economical Parallel Installation
- ◆ Comprehensive 5 Year Warranty
- ◆ Shipping Weight=12lbs

Specification Sheet

1449 3rd Edition

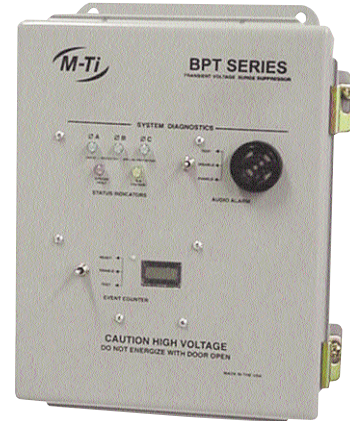


MOUNTING INFORMATION



After determining a position to mount the device, that will minimize the length of connecting wires, drill a hole in the enclosure for the conduit to run wires from the distribution panel to the connecting lugs inside the SPD. Installation is simplified if the wires enter the enclosure at the top (see figure #2) of the enclosure. Securely mount the SPD unit using 1/4-20 bolts in the four (4) mounting holes provided in the enclosure's mounting flanges.

CONSTRUCTION
14 gauge steel with continuous hinge
UL 50 Type 12 & Type 13
NEMA/EEMAC Type 12 & Type 13
JIC standard EGP-1-1967
CSA Type 12. IEC 529, IP65

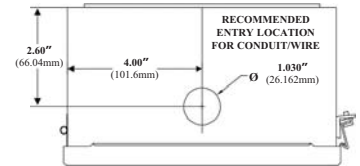

PERFORMANCE

- ◆ Maximum Surge Current (8/20us waveform): 100kA or 200kA per phase (based on specific model number)
- ◆ Operating Frequency: 47/63Hz
- ◆ Optional Filtering: -50dB @ 100KHz (MIL-STD-220A)
- ◆ Operating Temperature Range: -40⁰ to +85⁰ C
- ◆ Operating Humidity Range: 0 to 95% (non-condensing)

Ordering Information:

MODEL NUMBER	SERVICE VOLTAGE	MCOV	CLAMP VOLTAGE RATINGS Per UL 1449 3rd Edition			
			L-N	L-G	N-G	L-L
BPTXXX/120-10-#-1/	120 volt Single Ø	150Vac	600V	600V	600V	N/A
BPTXXX/120-SP-#-1/	120/240 Volt Split Ø	150Vac	600V	600V	600V	1200V
BPTXXX/120-3W-#-1/	120/208 Volt 3Ø Wye	150Vac	600V	600V	600V	1200V
BPTXXX/120-3H-0-1/	120/240 Volt 3Ø Delta	150/320Vac	600/1000V	600/1000V	600V	1200/1500V
BPTXXX/240-3D-0-1/	240 Volt 3Ø Delta	320Vac	N/A	1000V	N/A	1200V
BPTXXX/220-3W-#-1/	220/380 Volt 3Ø Wye	320Vac	1000V	1000V	1000V	2000V
BPTXXX/230-3W-#-1/	230/400 Volt 3Ø Wye	320Vac	1000V	1000V	1000V	2000V
BPTXXX/240-3W-#-1/	240/415 Volt 3Ø Wye	320Vac	1000V	1000V	1000V	2000V
BPTXXX/277-3W-#-1/	277/480 Volt 3Ø Wye	320Vac	1000V	1000V	1000V	2000V
BPTXXX/480-3D-0-1/	480 Volt 3Ø Delta	520Vac	N/A	1800V	N/A	4000V

- NOTES:**
1. Replace XXX with desired kA rating, per phase: 100 for 100kA or 200 for 200kA.
 2. Replace # with F if filtering is required (WYE Models Only).
 3. Place a /RM at the end of the part number for the Remote Monitoring option.

